


Hudson Reed

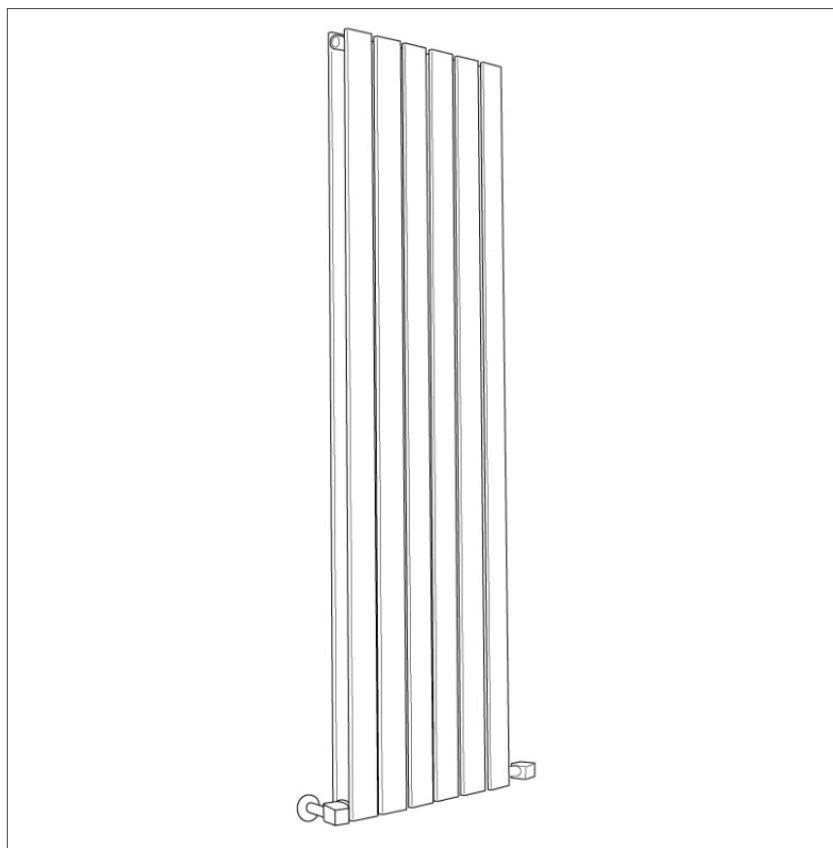

ALTURA (MM)	ANCHURA (MM)	ÚNICO/ DOBLE	ENTRE-EJE (MM)	PESO (KG)	RENDIMIENTO EN VATIOS DELTA T30	RENDIMIENTO EN VATIOS DELTA T50	RENDIMIENTO EN VATIOS DELTA T60	PROYECCIÓN DE LA PARED (MM)	PARED A CENTRO DE LA ENTRADA
1600	280	Unico	370 (Aprox.)	10.24	240	463	588	64	38
1780	280	Unico	370 (Aprox.)	11.39	269	520	659	64	38
1600	350	Unico	440 (Aprox.)	12.8	300	579	735	64	38
1780	350	Unico	440 (Aprox.)	14.24	337	650	825	64	57
1600	420	Unico	510 (Aprox.)	15.36	360	695	881	64	38
1780	420	Unico	510 (Aprox.)	17.09	404	780	990	64	38
1600	490	Unico	580 (Aprox.)	17.92	420	811	1028	64	38
1780	490	Unico	580 (Aprox.)	19.94	471	910	1154	64	38
1600	560	Unico	650 (Aprox.)	20.48	480	927	1175	64	38
1780	560	Unico	650 (Aprox.)	22.79	539	1040	1319	64	38
1600	280	Doble	370 (Aprox.)	20.48	358	695	882	88	57
1780	280	Doble	370 (Aprox.)	22.79	358	695	882	88	57
1600	350	Doble	440 (Aprox.)	25.6	447	869	1102	88	57
1780	350	Doble	440 (Aprox.)	28.48	498	974	1234	88	57
1600	420	Doble	510 (Aprox.)	30.72	537	1043	1321	88	57
1780	420	Doble	510 (Aprox.)	34.18	597	1168	1480	88	57
1600	490	Doble	580 (Aprox.)	35.84	626	1217	1542	88	57
1780	490	Doble	580 (Aprox.)	39.87	696	1362	1727	88	57
1600	560	Doble	650 (Aprox.)	40.96	716	1391	1762	88	57
1780	560	Doble	650 (Aprox.)	45.57	796	1558	1979	88	57