


Hudson Reed

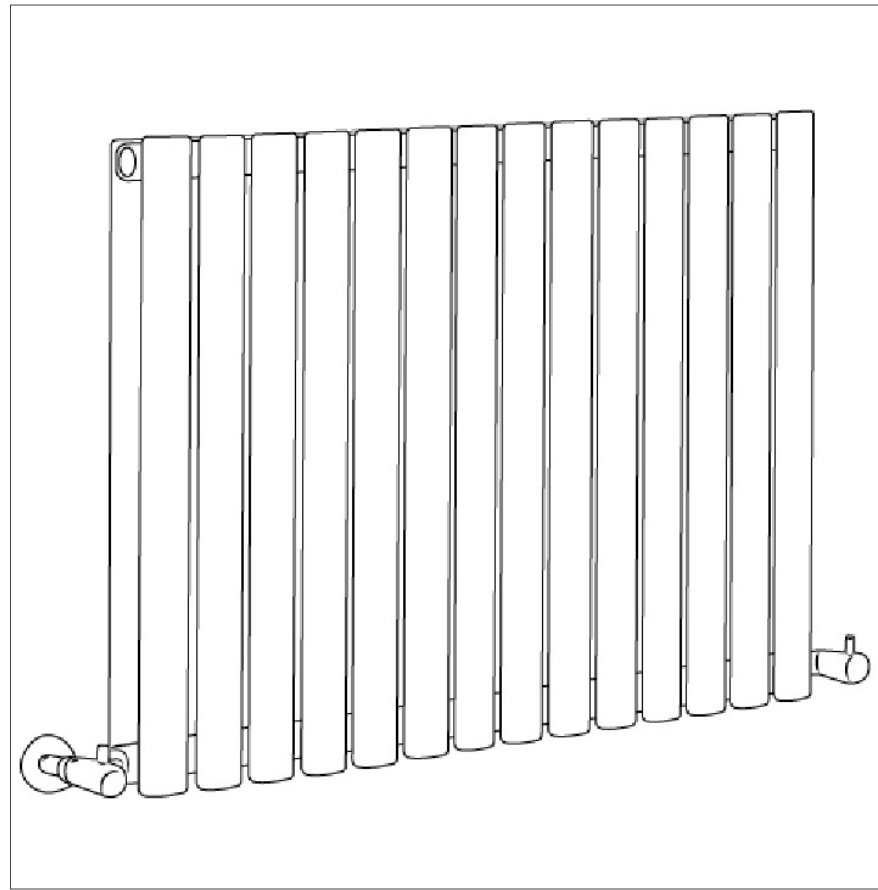

ALTURA (MM)	ANCHURA (MM)	UNICO/ DOBLE	ENTRE-EJE (MM)	PESO (KG)	RENDIMIENTO EN VATIOS DELTA T30	RENDIMIENTO EN VATIOS DELTA T50	RENDIMIENTO EN VATIOS DELTA T60	PROYECCIÓN DE LA PARED (MM)	PARED A CENTRO DE LA ENTRADA (MM)
635	415	Unico	505 (Aprox.)	10	172	331	418	86	47
635	595	Unico	685 (Aprox.)	13.6	246	473	597	86	47
635	834	Unico	924 (Aprox.)	18	344	662	836	86	47
635	1000	Unico	1090 (Aprox.)	21.5	418	803	1015	86	47
635	1180	Unico	1270 (Aprox.)	22	491	945	1194	86	47
635	1411	Unico	1501 (Aprox.)	30	590	1134	1433	86	47
635	1647	Unico	1737 (Aprox.)	35	688	1323	1671	86	47
635	415	Doble	505 (Aprox.)	16.8	265	514	652	104	65
635	595	Doble	685 (Aprox.)	23.1	378	735	932	104	65
635	834	Doble	924 (Aprox.)	27	529	1029	1304	104	65
635	1000	Doble	1090 (Aprox.)	36.1	643	1249	1584	104	65
635	1180	Doble	1270 (Aprox.)	40	756	1470	1863	104	65
635	1411	Doble	1501 (Aprox.)	46.5	907	1764	2236	104	65
635	1647	Doble	1737 (Aprox.)	49	1059	2058	2609	104	65