


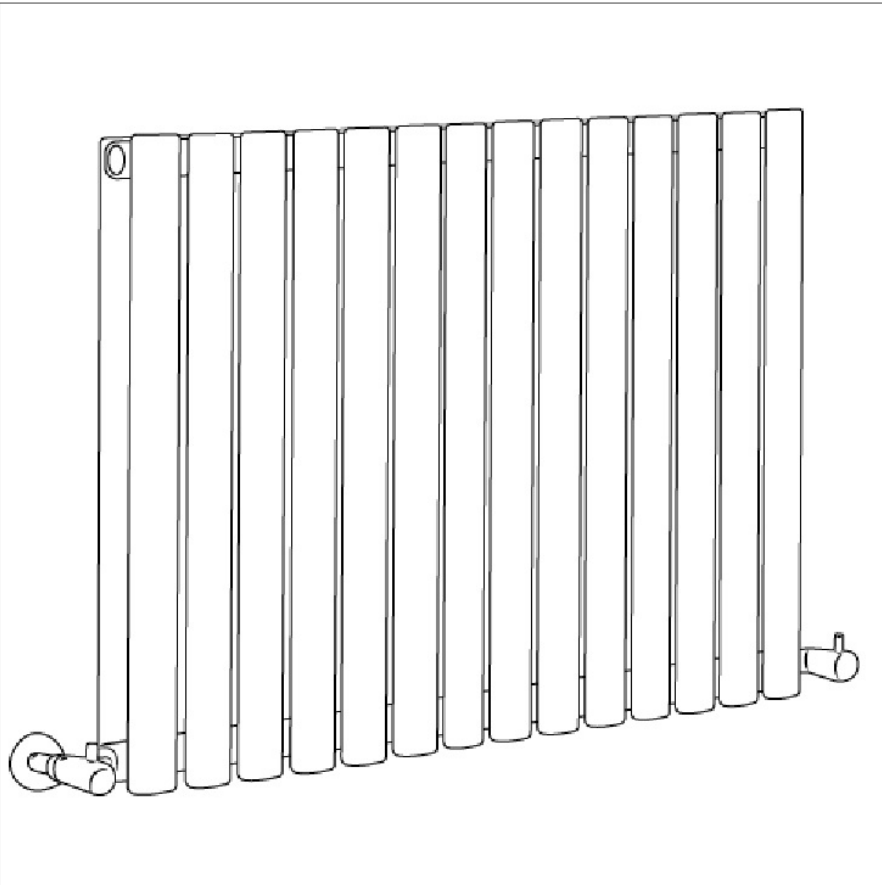

ALTURA (MM)	ANCHURA (MM)	UNICO/ DOBLE	ENTRE-EJE (MM)	PESO (KG)	RENDIMIENTO EN VATIOS DELTA T30	RENDIMIENTO EN VATIOS DELTA T50	RENDIMIENTO EN VATIOS DELTA T60	PROYECCIÓN DE LA PARED (MM)	PARED A CENTRO DE LA ENTRADA (MM)
635	590	Doble	685 (Aprox.)	13.6	378	735	1,034	104	65
635	826	Doble	916 (Aprox.)	18	529	1,029	1,447	104	65
635	1000	Doble	1090 (Aprox.)	21.5	643	1,249	1,758	104	65
635	1180	Doble	1270 (Aprox.)	22	756	1,470	2,068	104	65
635	1411	Doble	1501 (Aprox.)	30	907	1,764	2,481	104	65
635	1647	Doble	1737 (Aprox.)	35	1,059	2,058	2,895	104	65
400	595	Doble	685 (Aprox.)	23.1	255	490	686	104	65
400	826	Doble	916 (Aprox.)	27	357	686	960	104	65
400	1000	Doble	1090 (Aprox.)	36.1	433	833	1,166	104	65
400	1180	Doble	1270 (Aprox.)	40	509	980	1,372	104	65
400	1411	Doble	1501 (Aprox.)	46.5	611	1,176	1,646	104	65
400	1647	Doble	1737 (Aprox.)	49	713	1,372	1,920	104	65