


Hudson Reed

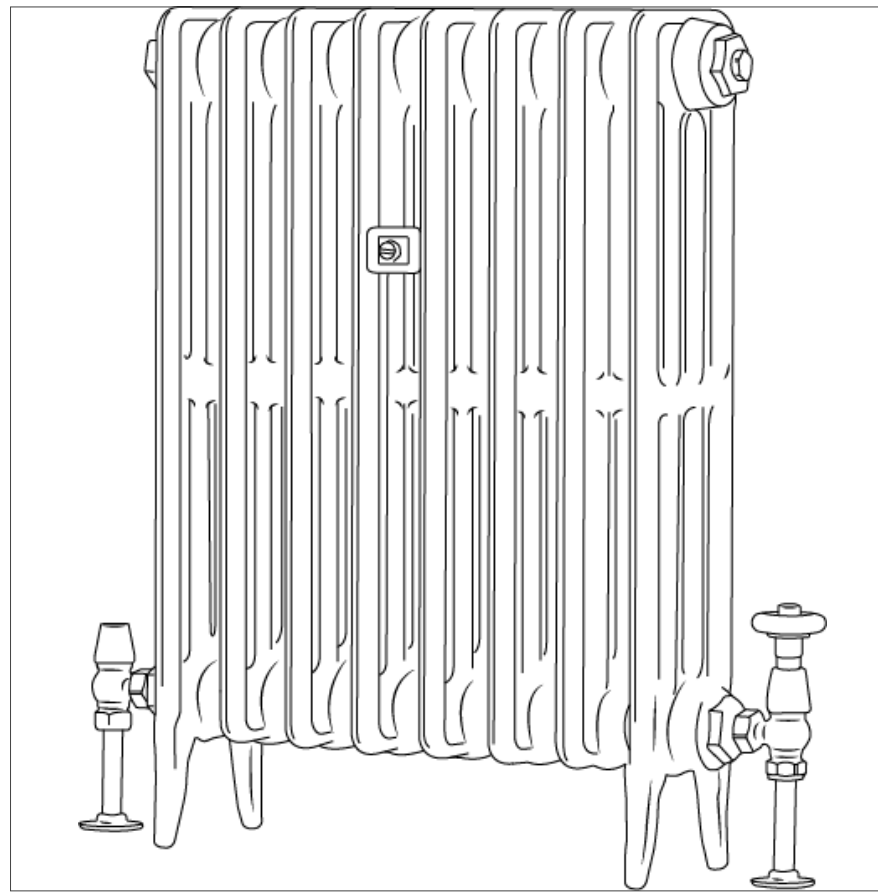

NÚMERO DE SECCIONES	ALTURA (MM)	ANCHURA (MM)	PROFUNDIDAD (MM)	ENTRE-EJE (MM)	PESO (KG)	RENDIMIENTO EN VATIOS DELTA T30	RENDIMIENTO EN VATIOS DELTA T50	RENDIMIENTO EN VATIOS DELTA T60	PROYECCIÓN DE LA PARED (MM)	PARED A CENTRO DE LA ENTRADA (MM)
3	460	218	143	308 (Aprox.)	11.4	88	166	209	160	85
4	460	279	143	369 (Aprox.)	14.6	117	222	279	160	85
5	460	340	143	430 (Aprox.)	17.8	147	277	348	160	85
6	460	401	143	491 (Aprox.)	21	176	333	418	160	85
7	460	462	143	552 (Aprox.)	24.2	205	388	488	160	85
8	460	523	143	613 (Aprox.)	27.3	235	444	557	160	85
9	460	584	143	674 (Aprox.)	30.5	264	499	627	160	85
10	460	645	143	735 (Aprox.)	33.7	293	555	697	160	85
11	460	706	143	796 (Aprox.)	36.9	323	610	766	160	85
12	460	767	143	857 (Aprox.)	40.1	352	666	836	160	85
13	460	828	143	918 (Aprox.)	43.7	382	721	906	160	85
14	460	889	143	979 (Aprox.)	47.4	411	777	975	160	85
15	460	950	143	1040 (Aprox.)	50.1	440	832	1,045	160	85
16	460	1011	143	1101 (Aprox.)	53.8	470	888	1,115	160	85
17	460	1072	143	1162 (Aprox.)	56.5	499	943	1,184	160	85
18	460	1133	143	1223 (Aprox.)	60.1	528	999	1,254	160	85
19	460	1194	143	1284 (Aprox.)	62.8	558	1,054	1,324	160	85
20	460	1255	143	1345 (Aprox.)	66.5	587	1,110	1,393	160	85