


Hudson Reed

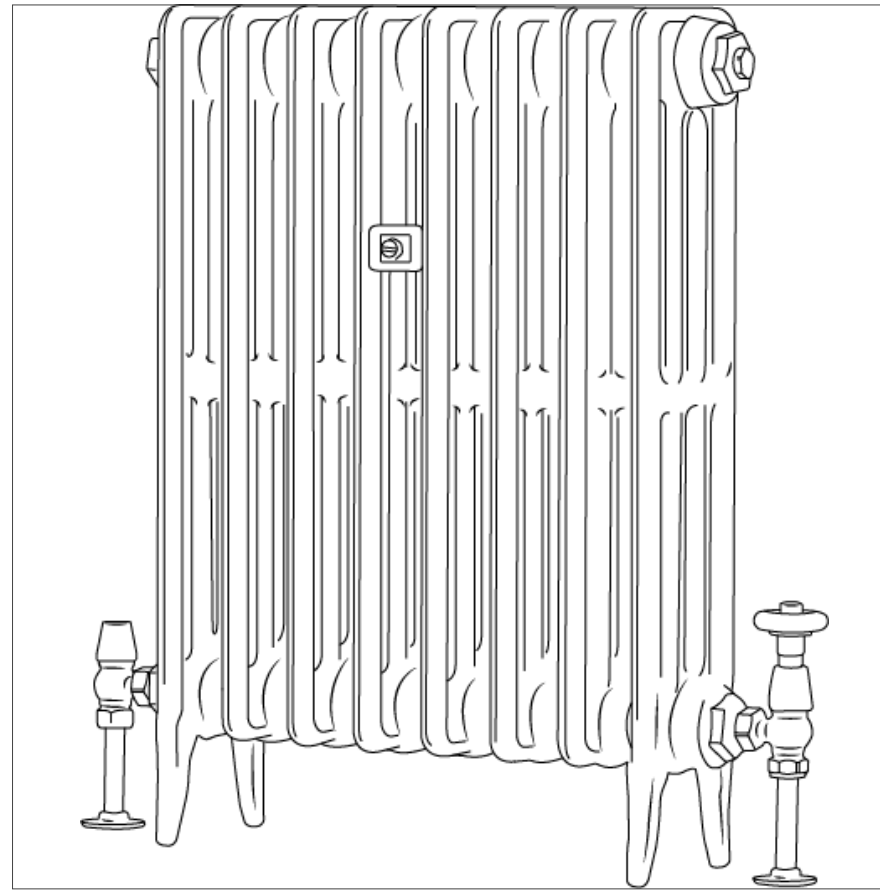

NÚMERO DE SECCIONES	ALTURA (MM)	ANCHURA (MM)	PROFUNDIDAD (MM)	ENTRE-EJE (MM)	PESO (KG)	RENDIMIENTO EN VATIOS DELTA T30	RENDIMIENTO EN VATIOS DELTA T50	RENDIMIENTO EN VATIOS DELTA T60	PROYECCIÓN DE LA PARED (MM)	PARED A CENTRO DE LA ENTRADA (MM)
3	660	218	143	308 (Aprox.)	14.59	124	240	303	160	85
4	660	279	143	369 (Aprox.)	19.04	166	320	404	160	85
5	660	340	143	430 (Aprox.)	23.48	207	399	505	160	85
6	660	401	143	491 (Aprox.)	27.93	248	479	606	160	85
7	660	462	143	552 (Aprox.)	32.38	290	559	707	160	85
8	660	523	143	613 (Aprox.)	36.83	331	639	808	160	85
9	660	584	143	674 (Aprox.)	41.28	373	719	909	160	85
10	660	645	143	735 (Aprox.)	45.72	414	799	1010	160	85
11	660	706	143	796 (Aprox.)	50.17	456	879	1111	160	85
12	660	767	143	857 (Aprox.)	54.62	497	959	1212	160	85
13	660	828	143	918 (Aprox.)	59.25	538	1039	1313	160	85
14	660	889	143	979 (Aprox.)	63.88	580	1119	1414	160	85
15	660	950	143	1040 (Aprox.)	68.14	621	1198	1515	160	85
16	660	1011	143	1101 (Aprox.)	72.77	663	1278	1616	160	85
17	660	1072	143	1162 (Aprox.)	77.04	704	1358	1717	160	85
18	660	1133	143	1223 (Aprox.)	81.67	745	1438	1818	160	85
19	660	1194	143	1284 (Aprox.)	85.94	787	1518	1919	160	85
20	660	1255	143	1345 (Aprox.)	90.56	828	1598	2020	160	85