


Hudson Reed

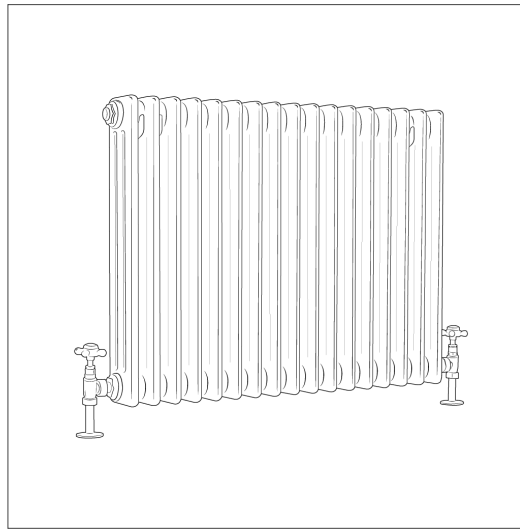

ALTURA (MM)	ANCHURA (MM)	COLUMNAS	ENTRE-EJE (MM)	RENDIMIENTO EN VATIOS DELTA T30	RENDIMIENTO EN VATIOS DELTA T50	RENDIMIENTO EN VATIOS DELTA T60	PROYECCIÓN DE LA PARED (MM)	PARED A CENTRO DE LA ENTRADA (MM)
300	605	3	695	218	417	525	124	74
300	785	3	875	286	546	687	124	74
300	1010	3	1100	370	706	889	124	74
300	1190	3	1280	437	835	1051	124	74
300	1415	3	1505	521	994	1252	122	74
300	1595	3	1685	588	1122	1413	122	74
500	785	3	875	390	764	971	122	74
500	1010	3	1100	505	989	1257	122	74
500	1190	3	1280	597	1169	1486	122	74
500	1415	3	1505	712	1394	1772	122	74
600	425	3	515	255	513	658	124	74
600	605	3	695	369	741	950	124	74
600	785	3	875	482	969	1243	124	74
600	1010	3	1100	624	1254	1608	124	74
600	1190	3	1280	737	1481	1900	124	74
600	1415	3	1505	853	1670	2123	122	74
600	1595	3	1685	963	1886	2397	122	74
750	785	3	875	584	1132	1434	122	74
750	1010	3	1100	755	1465	1856	122	74
750	1190	3	1280	893	1731	2193	122	74
750	1415	3	1505	1065	2064	2615	122	74