


Hudson Reed

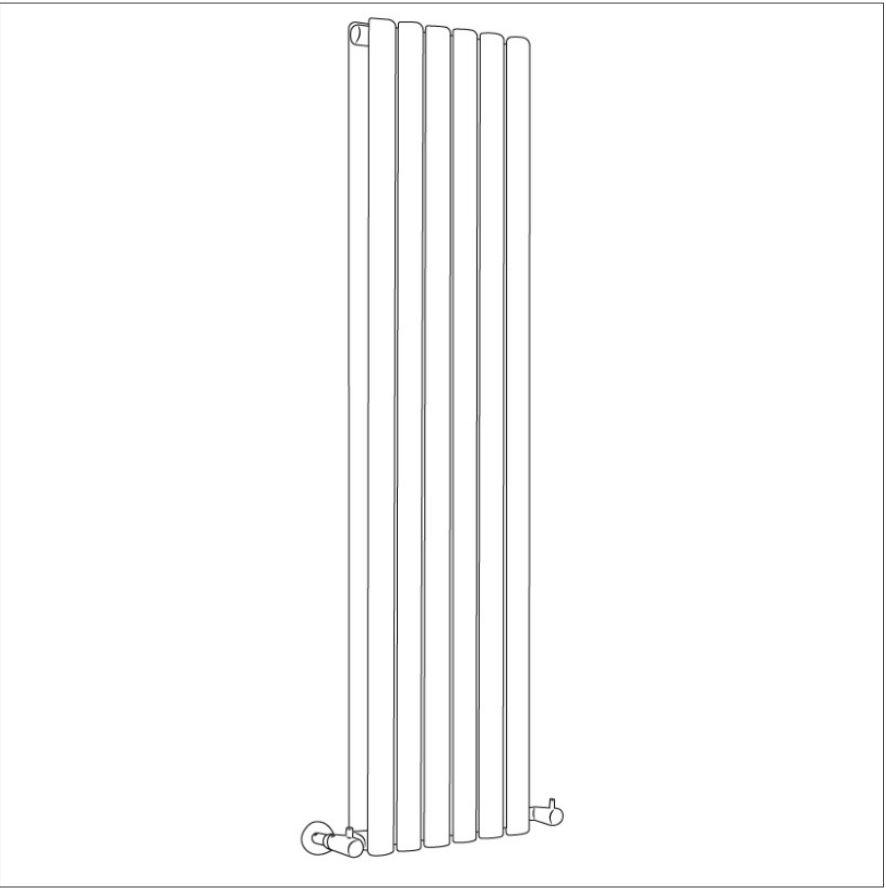

ALTURA (MM)	ANCHURA (MM)	UNICO/ DOBLE ENTRE-EJE (MM)		PESO (KG)	RENDIMIENTO EN VATIOS DELTA T30	RENDIMIENTO EN VATIOS DELTA T50	RENDIMIENTO EN VATIOS DELTA T60	PROYECCIÓN DE LA PARED (MM)	PARED A CENTRO DE LA ENTRADA
1600	354	Unico	444	16	349	661	841	86	47
1600	472	Unico	562	21	465	882	1122	86	47
1600	590	Unico	680	29.3	581	1102	1402	86	47
1780	236	Unico	326	12	245	471	595	86	47
1780	354	Unico	444	16	368	707	892	86	47
1780	472	Unico	562	21.64	490	942	1190	86	47
1780	590	Unico	680	32.2	613	1178	1487	86	47
1600	354	Doble	444	30	497	968	1228	104	65
1600	472	Doble	562	40	662	1291	1638	104	65
1600	590	Doble	680	51.5	828	1613	2047	104	65
1780	236	Doble	326	22	371	733	934	104	65
1780	354	Doble	444	32	557	1099	1401	104	65
1780	472	Doble	562	43	742	1465	1868	104	65
1780	590	Doble	680	55.5	928	1832	2335	104	65