


# Hudson Reed

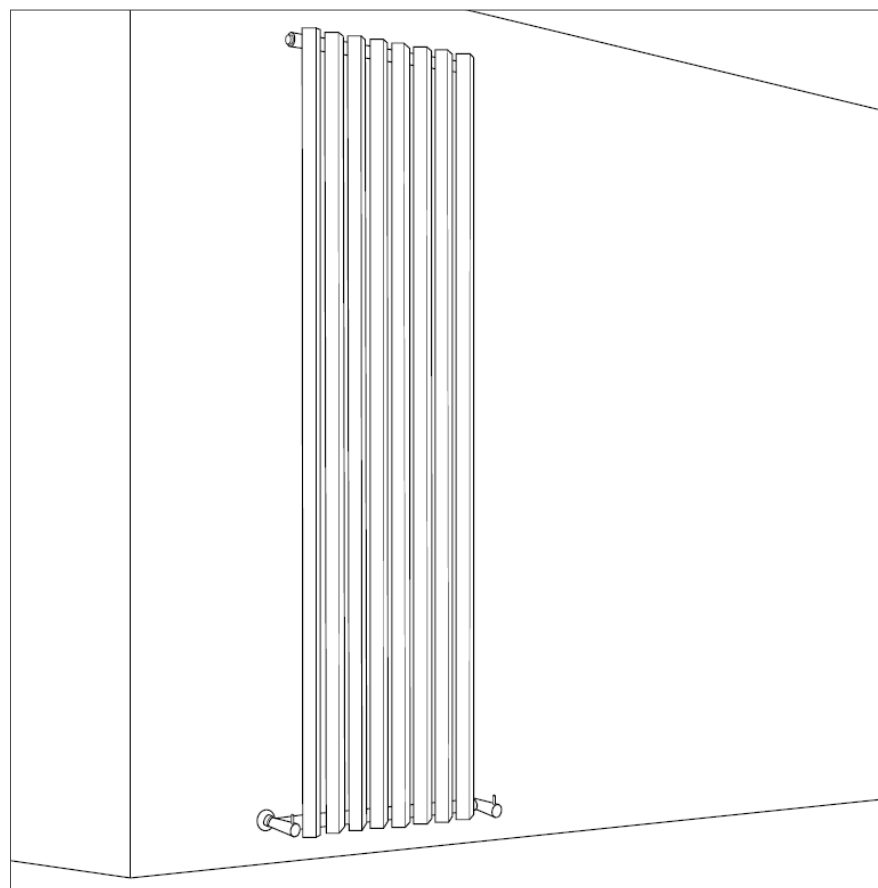

REFERENCIA	Altura (mm)	Anchura (mm)	ÚNICO/ DOBLE	ENTRE-EJE (MM)	PROYECCIÓN DE LA PARED (MM)	PARED A CENTRO DE LA ENTRADA (MM)	PESO (KG)	RENDIMIENTO EN VATIOS DELTA T30	RENDIMIENTO EN VATIOS DELTA T50	RENDIMIENTO EN VATIOS DELTA T60
DRWVP1	1600	280	ÚNICO	370 (APROX)	77	38	11.01	260	500	631
DRWVP21	1600	280	DOBLE	370 (APROX)	125	57	23.23	397	775	984
DRWVP2	1600	420	ÚNICO	510 (APROX)	77	38	16.51	390	749	946
DRWVP22	1600	420	DOBLE	510 (APROX)	125	57	31.84	595	1162	1476
DRWVP3	1600	560	ÚNICO	650 (APROX)	77	38	22.02	520	999	1262
DRWVP23	1600	560	DOBLE	650 (APROX)	125	57	42.46	794	1550	1968
TDRWVP1	1780	280	ÚNICO	370 (APROX)	77	38	12.25	288	554	701
TDRWVP21	1780	280	DOBLE	370 (APROX)	125	57	23.62	437	851	1079
TDRWVP2	1780	420	ÚNICO	510 (APROX)	77	38	18.37	432	832	1051
TDRWVP22	1780	420	DOBLE	510 (APROX)	125	57	35.43	656	1276	1619
TDRWVP3	1780	560	ÚNICO	650 (APROX)	77	38	24.5	576	1109	1401
TDRWVP23	1780	560	DOBLE	650 (APROX)	125	57	47.24	874	1702	2158