


Hudson Reed

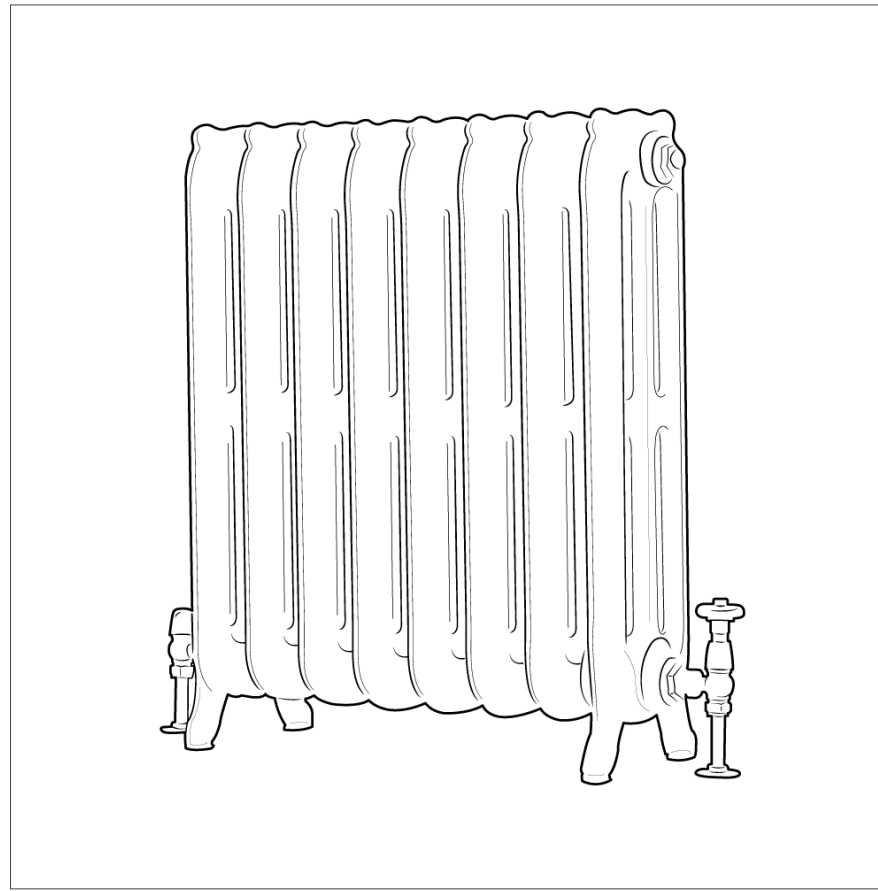

NÚMERO DE SECCIONES	ALTURA (MM)	ANCHURA (MM)	PROFUNDIDAD (MM)	ENTRE-EJE (MM)	PESO (KG)	RENDIMIENTO EN VATIOS DELTA T30	RENDIMIENTO EN VATIOS DELTA T50	RENDIMIENTO EN VATIOS DELTA T60	PROYECCIÓN DE LA PARED	PARED A CENTRO DE LA ENTRADA (MM)
3	768	272	250	362 (Aprox.)	40.6	218	431	550	260	150
4	768	351	250	441 (Aprox.)	52.41	291	575	733	260	150
5	768	430	250	520 (Aprox.)	64.2	364	719	916	260	150
6	768	509	250	599 (Aprox.)	76	436	862	1100	260	150
7	768	588	250	678 (Aprox.)	87.8	509	1006	1283	260	150
8	768	667	250	757 (Aprox.)	99.59	582	1150	1466	260	150
9	768	746	250	836 (Aprox.)	111.39	654	1293	1649	260	150
10	768	825	185	915 (Aprox.)	123.18	727	1437	1833	260	150
11	768	904	250	994 (Aprox.)	134.98	800	1581	2016	260	150
12	768	983	250	1073 (Aprox.)	146.78	873	1724	2199	260	150
13	768	1062	250	1152 (Aprox.)	160.87	945	1868	2382	260	150
14	768	1141	250	1231 (Aprox.)	174.97	1018	2012	2566	260	150
15	768	1220	250	1310 (Aprox.)	184.47	1091	2156	2749	260	150
16	768	1299	250	1389 (Aprox.)	198.56	1163	2299	2932	260	150
17	768	1378	250	1468 (Aprox.)	208.06	1236	2443	3115	260	150
18	768	1457	250	1547 (Aprox.)	222.16	1309	2587	3299	260	150
19	768	1536	250	1626 (Aprox.)	231.65	1382	2730	3482	260	150
20	768	1615	250	1705 (Aprox.)	245.75	1454	2874	3665	260	150