


Hudson Reed

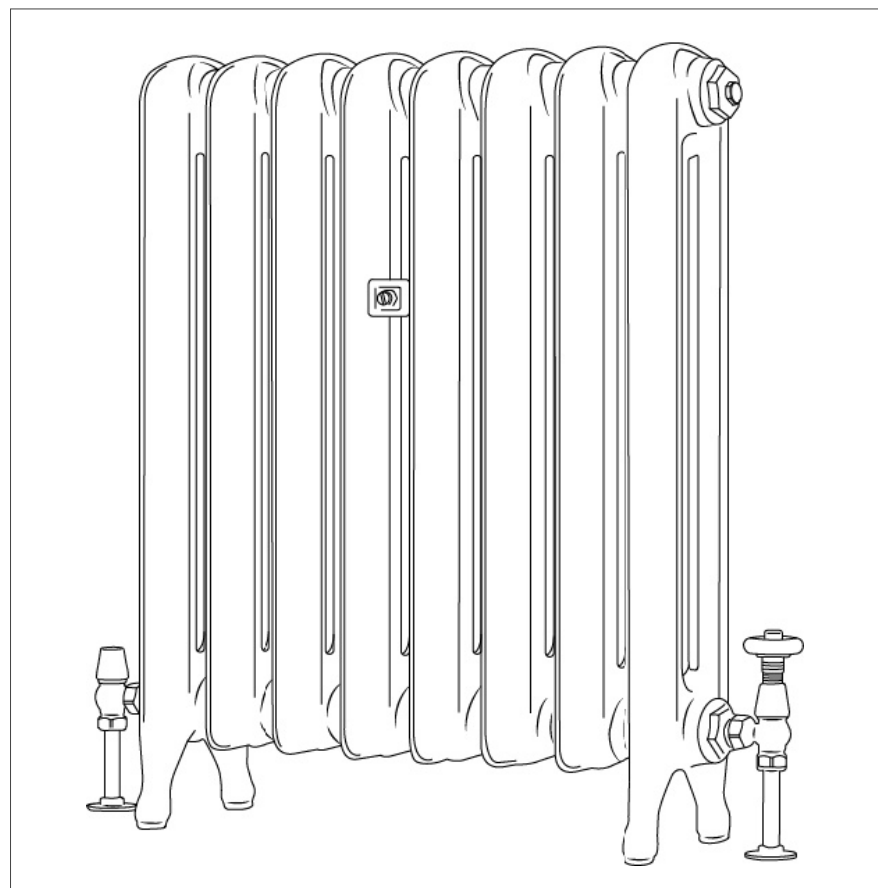

NÚMERO DE SECCIONES	ALTURA (MM)	ANCHURA (MM)	PROFUNDIDAD (MM)	ENTRE-EJE (MM)	PESO (KG)	RENDIMIENTO EN VATIOS DELTA T30	RENDIMIENTO EN VATIOS DELTA T50	RENDIMIENTO EN VATIOS DELTA T60	PROYECCIÓN DE LA PARED	PARED A CENTRO DE LA ENTRADA (MM)
3	560	272	185	362 (Aprox.)	23.48	141	277	351	205	115
4	560	351	185	441 (Aprox.)	29.93	189	369	469	205	115
5	560	430	185	520 (Aprox.)	36.38	236	461	586	205	115
6	560	509	185	599 (Aprox.)	42.82	283	553	703	205	115
7	560	588	185	678 (Aprox.)	49.27	330	645	820	205	115
8	560	667	185	757 (Aprox.)	55.72	377	738	937	205	115
9	560	746	185	836 (Aprox.)	62.17	424	830	1054	205	115
10	560	825	185	915 (Aprox.)	68.62	471	922	1171	205	115
11	560	904	185	994 (Aprox.)	75.07	519	1014	1289	205	115
12	560	983	185	1073 (Aprox.)	81.52	566	1106	1406	205	115
13	560	1062	185	1152 (Aprox.)	89.59	613	1199	1523	205	115
14	560	1141	185	1231 (Aprox.)	97.66	660	1291	1640	205	115
15	560	1220	185	1310 (Aprox.)	102.49	707	1383	1757	205	115
16	560	1299	185	1389 (Aprox.)	110.56	754	1475	1874	205	115
17	560	1378	185	1468 (Aprox.)	115.39	801	1567	1991	205	115
18	560	1457	185	1547 (Aprox.)	123.46	849	1660	2109	205	115
19	560	1536	185	1626 (Aprox.)	128.28	896	1752	2226	205	115
20	560	1615	185	1705 (Aprox.)	136.36	943	1844	2343	205	115